

Chimney taping

In compliance with NF EN 62561-2 standard


Taping is designed for fixing Early Streamer Emission lightning rods and simple rods from DUVAL MESSIEN range, equipped with elevation rod or not and on all type of support with important diameter, such as industrial chimneys, towers, concrete masts, etc (square or rectangular section).

Made up of 2 chimney fixings and 5 meters of galvanized steel strip coil 40 x 0,6mm provided.
Quantity of brackets will be determined regarding to the height of the expected protection.

- 1 lightning rod only : 2 offset brackets
- 1 lightning rod equipped with an elevation rod : 2 offsets brackets *
- 1 lightning rod equipped with a set of 2 masts : 3 offsets brackets *
- 1 lightning rod equipped with a set of 3 masts : 3 offsets brackets *

* This quantity must however be validated according to the location of the installation, weather and support constraints. (it is recommended to respect a distance from 300 to 400mm minimum between the offsets).

Reference :	CERCLCHEM
Material :	Galvanized steel (taping)+ Bichromate steel (fixings)
Composition :	2 fixings + 5 m of strip coil
Dimensions (mm):	320 x 110 x 100
Weight (kg) :	1,8
Standards :	NF EN 62561-4 - NF EN 62305-3 - NFC 17102

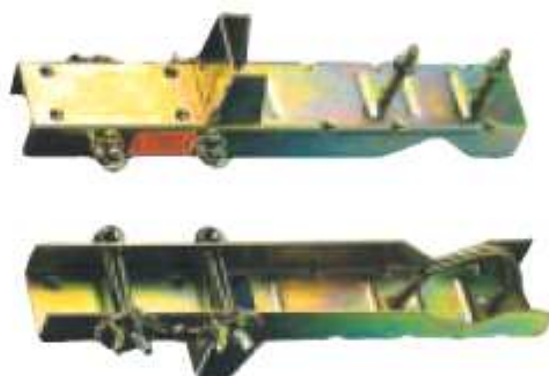

Join us on :



Version 2020 - A