

DUVAL MESSIEN

A know how famous since more than one century
Lightning technical datasheet



Offset collar in stainless steel


In compliance with NF EN 62561-4 standard

This collar is designed for fixing without offset the Early Streamer Emission lightning rods and simple rods from DUVAL MESSIEN range and equipped or not with an elevation rod or not, on tower, vertical structures, metallical frameworks, along a vertical or horizontal metallic shaped :

- On a mast from 2 to 4 m, foreseen 2 *collars,
- On a mast from 5 to 6 m, foreseen 3 *collars.

* This quantity must however be validated according to the location of the installation, weather and support constraints. (it is recommended to respect a distance from 300 to 400mm minimum between the offsets).

Reference :	COLLRMATXI	COLLRMATCI
Material :	Stainless steel	
Use :	Horizontal support	Vertical support
Dimensions (in mm):	87 x 112 x 112	87 x 35 x 112
Weight (kg) :	5,100	
Standard :	NF EN 62561-4 - NF EN 62305-3 - NFC 17102	

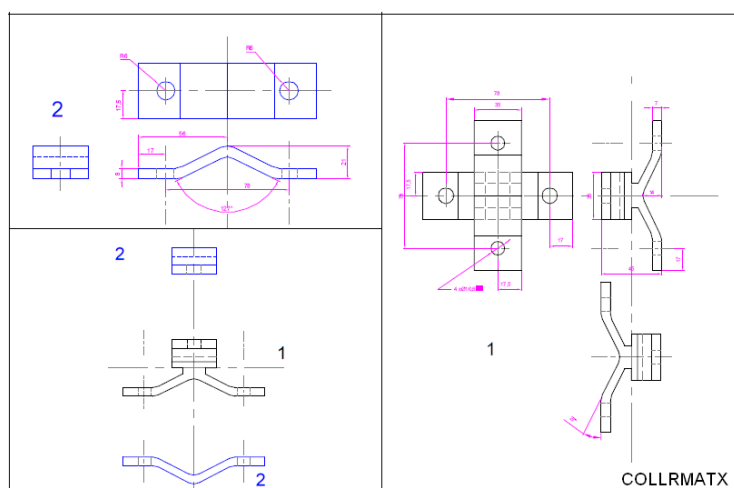

Join us on :



Version 2020 - A

Duval Messien Tel:+33 1 60 18 58 70 / Fax :+33 1 60 18 58 71 – Email : contact@duval-messien.fr
30 rue de la Varenne – 94100 Saint Maur des Fossés – France - Web : www.duval-messien.fr
Agence Ouest (Nantes) Tel :+33 2 40 54 79 30 - Agence Sud Est (Velaux) Tel :+33 4 42 34 71 00