

DUVAL MESSIEN

A know how famous since more than one century

Technical datasheet



6 meters stainless steel slot in rod *In compliance with NF EN 62305-3 / NF C 17-102 standards*


6 meters slot in rod are designed for raising the lightning rods. It is in 304L stainless steel, threaded at one end M34X150 to receive the lightning rod.

These masts are delivered in 3 pieces of 2 meters and 1 EMI34/34 press fit.

It exists in reinforced version 1 mast $\varnothing 34$ + 1mast $\varnothing 42$ and 1 EMI34/42 press fit.

CHARACTERISTICS

Reference:	MIEMB6S3N
Type of installation:	Lightning rod
Assembly:	Interlocking between masts with fittings.
Material:	304L stainless steel
Composition:	2 Masts $\varnothing 34$ +1 press fit 34/34, 1 mast $\varnothing 42$ +1 Mast $\varnothing 34$ + 1 press fit 34/42
Dimensions:	6 m x $\varnothing 42$ mm maxi
Weight:	18,4 kg

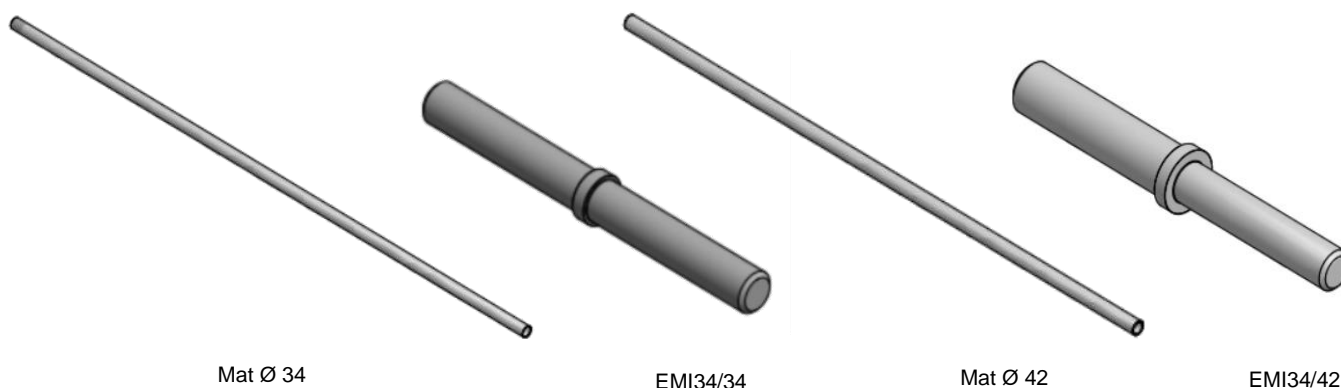

Join us on :



Version 2020 - A

Duval Messien Tel:+33 1 60 18 58 70 / Fax :+33 1 60 18 58 71 – Email : contact@duval-messien.fr
30 rue de la Varenne – 94100 Saint Maur des Fossés – France - Web : www.duval-messien.fr
Agence Ouest (Nantes) Tél :+33 2 40 54 79 30 - Agence Sud Est (Velaux) Tel :+33 4 42 34 71 00