



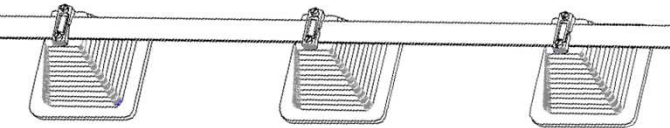

Lightning products

Conductor fixings

Cement «conductors support » stud



These studs allow flat or round conductors to be fixed to the roof without compromising the waterproofing. Green or gravel roofs can also be installed. This solution also facilitates maintenance or replacement of seals.

The 27x2mm tinned copper strip, 30x2mm stainless steel, 30x3mm aluminum, 33.5x3mm galvanized steel and Ø8 and 10mm round conductors are held under pressure at the removable upper part.

The stud allows the conductor to be spaced 80mm from the support (height between the base and the axis of the conductor). Its weight avoids the need for gluing.

The spacing between each fixing will be determined according to the applicable installation standard (NFC 17102 or NF EN 62305-3).

Available with clip and cement (PLOVIDATTA).

Characteristics

Reference :	PLOCIMATTA
Type of installation :	Down conductor and bonding between lightning rods
Assembly :	Installation of the studs on roof without sticking, installation of the conductors with fixing and 2 stainless steel screws.
Use :	Fixing of the conductor for meshing, horizontal conductors and equipotential connections
Conductor :	Strip coil with 27x2 to 33,5x3 mm section and round Ø8 to 10mm
Material :	Polyethylene + ciment
Dimensions :	140 x 140 x 80 mm
Weight :	1,00 kg
Standards :	NF EN 50164-4 - NF EN 62305-3

Duval Messien® - A full range of lightning and overvoltage protection.

In the continue framework of its products, Duval Messien shall be entitled to modify specifications without notice.