



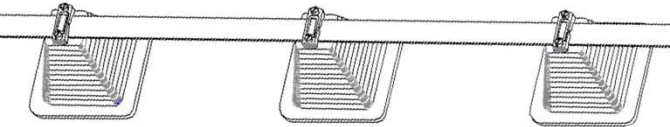

Lightning products

Conductor fixings

Cement «conductors support » stud



These studs are designed for fixing flat or round conductors on a roof without damaging the waterproofing. It can be also installed on plant covered or gravel roofs.

This solution makes easier the maintenance or the replacement of the waterproofing.

Conductors type 27x2mm tinned copper strip coils, 30x2mm stainless steel, 30x3mm aluminum, and 33,5x3mm galvanized steel and round $\varnothing 8$ and 10mm are maintained in pressure at the removable upper part.

The stud allows spacing the conductor of 80mm regarding to the support (height between the base and the axis of the conductor).

The space between each fixing will be determinate according to the applicable installation standard (NFC 17102 or NF EN 62305-3).

Available with clip and cement (PLOCIMATTA).

Characteristics

Reference :	PLOVIDATTA
Type of installation :	Down conductor and bonding between lightning rods
Assembly :	Installation of the studs on roof without sticking, installation of the conductors with fixing and 2 stainless steel screws.
Use :	Fixing of the conductor for meshing, horizontal conductors and equipotential connections
Conductor :	Strip coil with 27x2 to 33,5x3 mm section and round $\varnothing 8$ to 10mm
Material :	Polyethylene
Dimensions :	140 x 140 x 80 mm
Weight :	0,080 kg
Standards :	NF EN 62305-3

Duval Messien® - A full range of lightning and overvoltage protection.

In the continue framework of its products, Duval Messien shall be entitled to modify specifications without notice.