



# Trigger guard


Reference	Designation
PONTCUE	Copper trigger guard

## Description

Designed for fixing flat conductors (tape) on steel tanks or zinc roof by welding with tin.

It can be also fixed with (rivets « pop » in copper).

## Picture

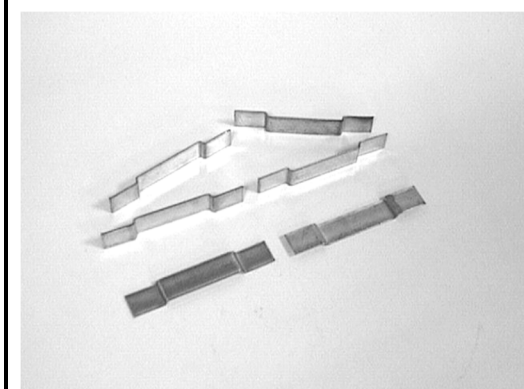

## Features

Material :	Tinned copper
Dimension (mm) :	100 x 60 x 10
Weight (kg)	0.004
Standard :	NF EN 50164-4